


Complete TorqueControl Program



Professional TorqueControl Screwdrivers




Wiha iTorque Sets

	DESCRIPTION	Page
	iTorque Sets	3

Wiha TorqueControl Tools

	DESCRIPTION	Page
	TorqueFix Handle	4
	TorqueVario Handle	4
	TorqueVario Handle (Newton Meter Scale)	4
	Standard Blades Slotted, Phillips, Torx®, TorxPlus®, Hex	5
	MicroBits Slotted, Phillips, Torx®, Hex, Security Torx® & Hex	6
	TorqueControl Sets	7-8

Wiha TorqueControl ESD Safe Tools

DESCRIPTION		Page
	TorqueVario Handle	9
	ESD Safe Blades	9
	ESD Safe Set TorqueVario	9

Wiha Torque *SlimLine* Insulated Tools

	DESCRIPTION	Page
	TorqueVario Handle	10
	Insulated Blade Holder	10
	Insulated SlimLine Blades	10
	Slotted, Phillips, Terminal, TORX, Square	
	Ins. Torque SlimLine Sets	11

Wiha TorqueControl T-handle Tools

	DESCRIPTION	Page
	T-handle Torque Tools	11
	Blades	12

Wiha TorqueControl Accessories

DESCRIPTION	Page
 TorqueControl Adapters	13
 Torque Cable Key	13

Wiha Easy Torque Handles

	DESCRIPTION	Page
	Easy Torque Handles	14

Notes:

TorqueVario-S ESD was developed for use in anti-static environments and TorqueVario-S ESD provides safety when working with electronic components. All Wiha TorqueVario-S models have an integrated window scale that displays the torque value - a completely new design, which eliminates false readings. The torque value is continuously adjustable by using the provided adjustment tool (TorqueSetter) this prevents the setting from being altered unintentionally.

Wiha Professional TorqueControl Adjustable iTorque Tools

iTorque Screwdrivers

- Metric (Nm) & Inch (In-lbs / oz)
- Built in click counter
- Auto shut off
- Fast adjusting
- Cycle Counter
- Accurate +/- 6%



52 Piece Set



With Certificate of Calibration

[SHOP](#)

28892 52 Piece iTorque Bit Set, In Metal Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M.

Set includes ergonomic multi-component adjustable iTorque handle 7-26 in/lbs., 50 insert bits & 1/4" bit holder.

Item No.		
28892	Slotted: 4.5, 5.5, 6.5, 8.0mm	lbs.
	Phillips: #0, #1, #2, #3	2.02
	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30	
	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16"	
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm	
	Pozidriv: #0, #1, #2, #3	
	Torq Set: #4, #5, #6, #8	
	Square: #1, #2, #3	
	Triwing: #0, #1, #2, #3, #4	
	iTorque Handle Range 7 - 26 Inch/lbs.	
	28581 - 1/4" Bit Holder	



52 Piece Set



With Certificate of Calibration

[SHOP](#)

28891 52 Piece iTorque Bit Set, In Metal Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M.

Set includes ergonomic multi-component adjustable iTorque handle 60-210 in/oz., 50 insert bits & 1/4" bit holder.

Item No.		
28891	Slotted: 4.5, 5.5, 6.5, 8.0mm	lbs.
	Phillips: #0, #1, #2, #3	2.02
	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30	
	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16"	
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm	
	Pozidriv: #0, #1, #2, #3	
	Torq Set: #4, #5, #6, #8	
	Square: #1, #2, #3	
	Triwing: #0, #1, #2, #3, #4	
	iTorque Handle Range 60 - 210 Inch/oz.	
	28581 - 1/4" Bit Holder	



52 Piece Set



With Certificate of Calibration

[SHOP](#)

28893 52 Piece iTorque Bit Set, In Metal Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M.

Set includes ergonomic multi-component adjustable iTorque handle 9-50 in/lbs., 50 insert bits & 1/4" bit holder.

Item No.		
28893	Slotted: 4.5, 5.5, 6.5, 8.0mm	lbs.
	Phillips: #0, #1, #2, #3	2.08
	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30	
	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16"	
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm	
	Pozidriv: #0, #1, #2, #3	
	Torq Set: #4, #5, #6, #8	
	Square: #1, #2, #3	
	Triwing: #0, #1, #2, #3, #4	
	iTorque Handle Range 9 - 50 Inch/lbs.	
	28581 - 1/4" Bit Holder	



Wiha Adjustable TorqueControl Tools

Wiha TorqueControl Screwdrivers

- **TorqueFix** factory preset torque
- **TorqueVario** adjustable torque drivers

molded cushion grip two component handles allow for maximum achievable torque to be reached with comfort.

Precise repeatability!

All TorqueFix & TorqueVario tools are tested and comply with:

- **EN ISO 6798**
- **BS EN 26789**
- **ASME B107.14M**

Each tool has unique serial number and certificate of calibration

Whether it's TorqueVario-S or TorqueFix - Wiha has a torque screwdriver to cover almost every application



[SHOP](#)

Direct Reading Scale

+/-6% accuracy tolerance
Certificate of calibration



[SHOP](#)

285 TorqueFix, With Wiha-SoftFinish® Handle

Fixed Torque value pre-set. Tested in accordance with EN ISO 6798, BS EN 26789, ASME B107.14M, tolerance +/- 6%. Audible and perceptible click when pre-set torque has been attained.

Automatically resets for next torque cycle; 50% greater reverse torque.

Item No.	Pre-Sets						
	oz.	lbs.	Nm	mm	Inch	lbs.	pkg.
28503	80	5	0.56	112	4.4	.16	1
28505	120	7.5	0.84	112	4.4	.15	1
28507	160	10	1.12	119	4.7	.28	1
28509	200	12.5	1.41	119	4.7	.27	1
28511	240	15	1.69	119	4.7	.27	1
28513	320	20	2.25	119	4.7	.28	1
28515	400	25	2.82	126	4.9	.37	1
28517	480	30	3.39	126	4.9	.37	1
28518	560	35	3.95	126	4.9	.37	1
28519	640	40	4.52	126	4.9	.37	1
28521	800	50	5.65	132	5.2	.52	1
28523	960	60	6.78	132	5.2	.52	1
28525	1120	70	7.91	132	5.2	.52	1

285 Adjustable TorqueVario With Direct Reading Scale

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

Item No.	Range				
	Inch	lbs.	Increments	mm	lbs.
28501*	15 - 80	(in/oz)	2.5 Inch oz	122 - 127	.22
28502	5 - 10		.5 Inch lbs	122 - 127	.41
28504	7.5 - 20		.5 Inch lbs	126 - 131	.50
28506	10 - 50		2 Inch lbs	133 - 138	.59
28508	20 - 70		2 Inch lbs	137 - 142	.74

Above includes Micro Bit Holder 28583

See 4mm Micro Bits on Page 6

* +/- 10% (This unit only)



+/-6% accuracy tolerance
Certificate of calibration

[SHOP](#)

285 Adjustable TorqueVario-S Handle - In Newton Meter Scale

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

Item No.	Newton				
	Meter Scale	Increments	mm	lbs.	pkg.
28550*	0.1 - 0.6Nm	.02 Nm	122 - 127	.35	1
28551	0.4 - 1.0Nm	.05 Nm	122 - 127	.35	1
28552	0.8 - 2.0Nm	.10 Nm	126 - 131	.45	1
28553	1.0 - 5.0Nm	.20 Nm	133 - 138	.55	1
28554	2.0 - 8.0Nm	.25 Nm	137 - 142	.70	1

* +/- 10% (This unit only)

All TorqueVario models include Torque setting adjustment tool



Wiha TorqueControl Blades - For Easy Torque, TorqueFix & TorqueVario Handles



285 Slotted Interchangeable Blades For TorqueFix & TorqueVario
Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	mm	Inch	mm	lbs.	Nm	pkg.
28534	1.5	.059	175	.07	0.15	1
28535	2.0	.078	175	.07	0.4	1
28536	2.5	.098	175	.07	0.4	1
28537	3.0	.118	175	.07	0.6	1
28538	3.5	.139	175	.07	1.1	1
28539	4.0	.157	175	.07	2.5	1

[SHOP](#)



285 Phillips Interchangeable Blades For TorqueFix & TorqueVario
Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	Size	mm	mm	lbs.	Nm	pkg.
28540	000	175	4.0	.07	0.4	1
28541	00	175	4.0	.07	0.4	1
28542	0	175	4.0	.07	0.9	1
28543	1	175	4.0	.07	3.8	1
28544	2	175	4.0	.07	5.5	1

[SHOP](#)



285 TORX® Interchangeable Blades For TorqueFix & TorqueVario
TORX® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	Size	mm	mm	lbs.	Nm	pkg.
28561	T5	175	4.0	.07	0.4	1
28562	T6	175	4.0	.07	0.6	1
28563	T7	175	4.0	.07	0.9	1
28564	T8	175	4.0	.07	1.3	1
28565	T9	175	4.0	.07	2.5	1
28566	T10	175	4.0	.07	3.5	1
28567	T15	175	4.0	.07	5.5	1
28568	T20	175	4.0	.07	8.0	1
28569	T25	175	4.0	.07	8.0	1

[SHOP](#)



285 TORXPlus® Blades For TorqueFix & TorqueVario
TORXPlus® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	Size	mm	mm	lbs.	Nm	pkg.
28571	IP5	175	4.0	.07	0.5	1
28572	IP6	175	4.0	.07	0.8	1
28573	IP7	175	4.0	.07	1.3	1
28574	IP8	175	4.0	.07	2.0	1
28575	IP9	175	4.0	.07	3.0	1
28576	IP10	175	4.0	.07	4.5	1
28577	IP15	175	4.0	.07	6.6	1
28578	IP20	175	4.0	.07	8.0	1
28579	IP25	175	4.0	.07	8.0	1

[SHOP](#)



285 Hex Metric Interchangeable Blades For TorqueFix & TorqueVario
Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	mm	mm	lbs.	Nm	pkg.	
28545	1.5	175	.07	0.9	1	
28546	2.0	175	.07	1.8	1	
28547	2.5	175	.07	3.8	1	
28548	3.0	175	.07	5.5	1	
28549	4.0	175	.07	8.0	1	

[SHOP](#)



285 Hex Inch Interchangeable Blades For TorqueFix & TorqueVario
Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	Inch	mm	lbs.	Nm	pkg.	
28555	.050	175	.07	.4	1	
28556	1/16	175	.07	.9	1	
28557	5/64	175	.07	1.8	1	
28558	3/32	175	.07	1.8	1	
28559	7/64	175	.07	3.8	1	
28560	1/8	175	.07	3.8	1	
28587	9/64	175	.07	8.0	1	
28588	5/32	175	.07	8.0	1	

[SHOP](#)



285 MagicSpring TORX® Interchangeable Blades For TorqueFix & TorqueVario
blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	Size	mm	mm	lbs.	Nm	pkg.
28512	T6	175	4.0	.07	0.6	1
28527	T7	175	4.0	.07	0.9	1
28528	T8	175	4.0	.07	1.3	1
28529	T9	175	4.0	.07	2.5	1
28530	T10	175	4.0	.07	3.8	1
28531	T15	175	4.0	.07	5.5	1
28532	T20	175	4.0	.07	8.0	1
28533	T25	175	4.0	.07	8.0	1

[SHOP](#)



286 MagicSpring TORXPlus® Interchangeable Blades For TorqueFix & TorqueVario
blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item				Max. Torque		
No.	Size	mm	mm	lbs.	Nm	pkg.
28611	IP6	175	4.0	.07	0.8	1
28612	IP7	175	4.0	.07	1.3	1
28613	IP8	175	4.0	.07	2.0	1
28614	IP9	175	4.0	.07	3.0	1
28616	IP10	175	4.0	.07	4.5	1
28617	IP15	175	4.0	.07	6.6	1
28618	IP20	175	4.0	.07	8.0	1
28619	IP25	175	4.0	.07	8.0	1

[SHOP](#)

*None of the blades featured on this page will function in a TorqueVario Insulated Handle

Wiha SYSTEM 4 Micro Bits


[SHOP](#)

750 SYSTEM 4 Slotted Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	mm	mm	Inch	lbs.
75008	0.8	28	1.1	.01
75012	1.2	28	1.1	.01
75015	1.5	28	1.1	.01
75018	1.8	28	1.1	.01
75020	2.0	28	1.1	.01
75025	2.5	28	1.1	.01
75030	3.0	28	1.1	.01
75035	3.5	28	1.1	.01
75040	4.0	28	1.1	.01


[SHOP](#)

751 SYSTEM 4 Phillips Bits High alloy chrome-vanadium-molybdenum steel, hardened, on 4 mm hex stock.

Item				
No.	Size	mm	Inch	lbs.
75105	000	28	1.1	.01
75110	00	28	1.1	.01
75115	0	28	1.1	.01
75120	1	28	1.1	.01


[SHOP](#)

753 SYSTEM 4 Hex Metric Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	mm	mm	Inch	lbs.
75307	0.7	28	1.1	.01
75309	0.9	28	1.1	.01
75313	1.3	28	1.1	.01
75315	1.5	28	1.1	.01
75320	2.0	28	1.1	.01
75325	2.5	28	1.1	.01
75330	3.0	28	1.1	.01
75340	4.0	28	1.1	.01


[SHOP](#)

753 SYSTEM 4 Hex Inch Bits High alloy chrome-vanadium-molybdenum steel, hardened, on 4 mm hex stock.

Item				
No.	Inch	mm	Inch	lbs.
75307	.028	28	1.1	.01
75309	.035	28	1.1	.01
75313	.050	28	1.1	.01
75350	1/16	28	1.1	.01
75352	5/64	28	1.1	.01
75354	3/32	28	1.1	.01
75356	7/64	28	1.1	.01
75358	1/8	28	1.1	.01
75360	9/64	28	1.1	.01
75340	5/32	28	1.1	.01


[SHOP](#)

757 SYSTEM 4 TORX® Bits

High alloy CVM steel, hardened, on 4 mm stock.

Item				
No.	Size	mm	Inch	lbs.
75703	T3	28	1.1	.01
75704	T4	28	1.1	.01
75705	T5	28	1.1	.01
75706	T6	28	1.1	.01
75707	T7	28	1.1	.01
75708	T8	28	1.1	.01
75709	T9	28	1.1	.01
75710	T10	28	1.1	.01
75715	T15	28	1.1	.01
75720	T20	28	1.1	.01


[SHOP](#)

757 SYSTEM 4 Security TORX® Bits

High alloy CVM steel, hardened, on 4 mm stock.

Item				
No.	Size	mm	Inch	lbs.
75727	T7s	28	1.1	.01
75728	T8s	28	1.1	.01
75729	T9s	28	1.1	.01
75735	T10s	28	1.1	.01
75739	T15s	28	1.1	.01
75742	T20s	28	1.1	.01


[SHOP](#)

753 SYSTEM 4 Metric Security Hex Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	mm	mm	Inch	lbs.
75322	2.0	28	1.1	.01
75327	2.5	28	1.1	.01
75332	3.0	28	1.1	.01
75342	4.0	28	1.1	.01


[SHOP](#)

753 SYSTEM 4 Security Hex Inch Bits

High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	Inch	mm	Inch	lbs.
75362	5/64	28	1.1	.01
75364	3/32	28	1.1	.01
75366	7/64	28	1.1	.01
75368	1/8	28	1.1	.01
75370	9/64	28	1.1	.01
75372	5/32	28	1.1	.01


[SHOP](#)

28583 Adapter Blade For Wiha 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item				
No.	Size	mm	mm	lbs. pkg.
28583	4.0	149	4.0	.09 1

Wiha Adjustable TorqueControl Tool Sets In Durable Storage Box



With Certificate
of Calibration

[SHOP](#)

28590 24 Piece TorqueVario-S Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool. Packed in a compact durable storage box.

Item No.		
28590	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1	lbs.
	TORX®: T6, T7, T8, T9, T10, T15	1.33
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32	
	28504 - Handle Range 7.5 - 20 Inch lbs.	



With Certificate
of Calibration

[SHOP](#)

28593 24 Piece TorqueVario-S Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool. Packed in a compact durable storage box.

Item No.		
28593	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1	lbs.
	TORX®: T6, T7, T8, T9, T10, T15	1.33
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32	
	28501 - Handle Range 15-80 Inch/oz (+/- 10%)	



53 Piece Set

With Certificate
of Calibration

[SHOP](#)

28595 53 Piece TorqueVario-S Bit Set, In Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 50 Insert bits, 1/4" Bit holder and Torque adjustment tool.

Item No.		
28595	Slotted: 4.5, 5.5, 6.5, 8.0mm	lbs.
	Phillips: #0, #1, #2, #3	2.85
	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30	
	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16"	
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm	
	Pozidriv: #0, #1, #2, #3	
	Torq Set: #4, #5, #6, #8	
	Square: #1, #2, #3	
	Triwing: #0, #1, #2, #3, #4	
	28506 - Handle Range 10 - 50 Inch lbs.	
	28581 - 1/4" Bit Holder	



59 Piece Set

With Certificate
of Calibration

[SHOP](#)

28589 59 Piece TorqueVario-S Bit Set, In Storage Box

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable TorqueVario-S handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.

Item No.		
28589	Slotted: 4.5, 5.5, 6.5mm	lbs.
	Phillips: #0, #1, #2	2.58
	TORX®: T5, T6, T7, T8, T9, T10, T15, T20, T25, T30	
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"	
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm	
	Pozidriv: #1, #2	
	Square: #1, #2, #3	
	Inch Sockets: 1/8, 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"	
	Metric Sockets: 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm	
	3 Handles: 15-80 Inch/oz., 5-10 & 10-50 In/lbs.	
	1/4" Bit Holder & 1/4"Hex to 1/4" Square adapter	

Wiha TorqueControl Sets In Durable Canvas Pouch



[SHOP](#)

28596 8 Piece TorqueControl Set With Slotted & Phillips Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 6 blades & Torque adjustment tool. Packed in a durable canvas pouch.

Item No.	lbs.
28596 Slotted: 2.5, 3.0, 3.5, 4.0mm	.95
Phillips: #0, #1	
28504 - Handle Range 7.5 - 20 Inch lbs.	

With Certificate of Calibration



[SHOP](#)

28599 14 Piece TorqueControl Set With TORX® & TORXPlus® Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Ergonomic multi-component adjustable TorqueVario-S handle, 12 blades & Torque adjustment tool. Packed in a durable canvas pouch.

Item No.	lbs.
28599 TORX®: T7, T8, T9, T10, T15, T20	1.25
TORXPlus®: IP7, IP8, IP9, IP10, IP15, IP20	
28506 - Handle Range 10 - 50 Inch lbs.	

With Certificate of Calibration




[SHOP](#)

28597 8 Piece TorqueControl Set With TORX® Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

Item No.	lbs.
28597 TORX®: T7, T8, T9, T10, T15, T20	1.01
28506 - Handle Range 10 - 50 Inch lbs.	

With Certificate of Calibration



[SHOP](#)

28690 8 Piece TorqueControl Set With MagicSpring TORXPlus® Screw Holding Blades

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

Item No.	lbs.
28690 MagicSpring TORXPlus®:	
IP7, IP8, IP9, IP10, IP15, IP20	1.02
28506 - Handle Range 10 - 50 Inch lbs.	

With Certificate of Calibration



[SHOP](#)

28598 8 Piece TorqueControl Set With TORXPlus® Blades
Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

Item No.	lbs.
28598 TORXPlus®: IP7, IP8, IP9, IP10, IP15, IP20	1.00
28506 - Handle Range 10 - 50 Inch lbs.	

With Certificate of Calibration



ESD Safe Adjustable TorqueControl Tools



285 ESD Safe TorqueVario-S, With Window Scale

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. With Certificate of accuracy.

Item No.	Range	Inch lbs.	Increments	mm	lbs.	pkg.
28522*	15 - 80(in/oz)	2.5 Inch oz	122 - 127	.33	1	
28524	5 - 10	.2 Inch lbs	122 - 127	.34	1	
28526	7.5 - 20	.5 Inch lbs	126 - 131	.42	1	

* +/- 10% (This unit only)

Each TorqueVario handle has unique serial number and certificate of calibration



28591 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.		lbs.
28591	Slotted: 1.5, 2.0, 3.0, 4.0mm	1.31
	Phillips: #00, #0, #1	
	TORX®: T6, T7, T8, T9, T10, T15	
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	
	28524 - Handle ESD Safe Range 5 - 10 Inch lbs.	

[SHOP](#)

28592 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.		lbs.
28592	Slotted: 1.5, 2.0, 3.0, 4.0mm	1.31
	Phillips: #00, #0, #1	
	TORX®: T6, T7, T8, T9, T10, T15	
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	
	28526 - Handle ESD Safe Range 7.5 - 20 Inch lbs.	



288 ESD Safe Slotted Interchangeable Blades For TorqueVario-S

Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item No.	mm	Inch	mm	lbs.	Nm	pkg.
28801	1.5	.059	175	.07	0.15	1
28803	2.0	.078	175	.07	0.4	1
28805	3.0	.118	175	.07	0.6	1
28807	3.5	.139	175	.07	1.1	1
28809	4.0	.157	175	.07	2.5	1

[SHOP](#)



288 ESD Safe Phillips Interchangeable Blades For TorqueVario-S

Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item No.	Size	mm	mm	lbs.	Nm	pkg.
28810	000	175	4.0	.07	0.4	1
28812	00	175	4.0	.07	0.4	1
28814	0	175	4.0	.07	0.9	1
28816	1	175	4.0	.07	3.8	1

[SHOP](#)



288 ESD Safe TORX® Interchangeable Blades For TorqueVario-S

TORX® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item No.	Size	mm	mm	lbs.	Nm	pkg.
28825	T5	175	4.0	.07	0.4	1
28826	T6	175	4.0	.07	0.6	1
28827	T7	175	4.0	.07	0.9	1
28828	T8	175	4.0	.07	1.3	1
28829	T9	175	4.0	.07	2.5	1
28830	T10	175	4.0	.07	3.8	1

[SHOP](#)



28890 24 Piece TorqueVario-S ESD Safe Micro-Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool.

Item No.		lbs.
28890	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1	1.33
	TORX®: T6, T7, T8, T9, T10, T15	
	Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	
	28522 - ESD Safe Handle Range 15-80 Inch/oz.	

Wiha Insulated TorqueControl Tools



 **1000V**

Includes Certificate

[SHOP](#)

287 Insulated TorqueVario-S, With Window Scale Insulation

 **up to 1000 Volt.** EN ISO 6798, BS EN 26789, ASME B107.14M, VDE, ASTM F-1505-01 & NFPA70E, +/- 6% Accuracy. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. Includes *SlimLine* blade holder.

Item No.	Range				
	Inch lbs.	Increments	mm	lbs.	pkg.
28724	7.5 - 20	.5 Inch lbs	126 - 131	.43	1
28726	10 - 50	2 Inch lbs	133 - 138	.40	1
28727	20 - 70	2 Inch lbs	137 - 142	.69	1

Each TorqueVario handle has unique serial number and certificate of calibration

287 Insulated TorqueVario-S Handle - In Newton Meter Scale

Includes *SlimLine* blade holder.

Item No.	Range			
	Nm	mm	lbs.	pkg.
28734	0.6 - 2.0	131	.45	1
28736	1.0 - 5.0	138	.45	1
28737	2.0 - 8.0	142	.72	1

[SHOP](#)

Each TorqueVario handle has unique serial number and certificate of calibration

 **1000Volt**



[SHOP](#)

28350 Insulated *SlimLine* Torque Blade Holder

Chrome-vanadium-molybdenum steel. Through hardened black finish. ClicFix quick release holder securely locks blades.

Item No.	OAL	OAL		
	mm	mm	Inch	lbs. pkg.
28350	6.0	170	6.7	.02 1

Wiha Insulated *SlimLine* Blades

33%
narrower
insulation
diameter



Wiha Insulated *SlimLine* Blades



[SHOP](#)

283 Insulated Slotted *SlimLine* Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter then standard insulated tools.

Item No.			Slim	Max	Inch/		
	mm	Inch	Dia.	Nm	lbs.	lbs.	Pkg.
28308	3.0	.118	4.1	0.6	5.3	.02	1
28309	4.0	.157	4.1	2.5	22.2	.02	1
28312	5.5	.216	6.1	3.8	33.7	.02	1
28315	6.5	.255	6.1	5.5	48.8	.02	1



[SHOP](#)

283 Insulated Phillips *SlimLine* Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter then standard insulated tools.

Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28317	1	4.1	3.8	33.7	.02	1
28319	2	6.1	5.5	48.8	.02	1



[SHOP](#)

283 Insulated Xeno Slotted & Phillips *SlimLine* Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter then standard insulated tools.

Item	⊕	Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28327	1	4.1	3.8	33.7	.02	1
28329	2	6.1	5.5	48.8	.02	1



[SHOP](#)

283 Insulated **TORX**® *SlimLine* Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter then standard insulated tools.

Item		Slim	Max	Inch/ 	
No.	Size	Dia.	Nm	lbs.	Pkg.
28339	T8	4.1	1.3	11.5	.02 1
28340	T10	4.1	3.8	33.7	.02 1
28341	T15	6.1	5.5	48.8	.02 1
28342	T20	6.1	5.5	48.8	.02 1



[SHOP](#)

283 Insulated Square *SlimLine* Blades

High quality CV steel, through hardened. *SlimLine* blades have up to 33% narrower insulation diameter then standard insulated tools.

Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28346	1	4.1	3.8	33.7	.02	1
28347	2	6.1	5.5	48.8	.02	1

Insulated Torque & SlimLine Tool Sets



[SHOP](#)

28791 8 Piece Insulated TorqueControl Set With Slotted & Phillips SlimLine Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 5 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.	lbs.
28791 SlimLine Slotted: 3.0, 4.0, 5.5mm	.87
SlimLine Phillips: #1, #2	
28726 - Handle Range 10-50 Inch/lbs.	
SlimLine Blade Holder	

With Certificate of Calibration



[SHOP](#)

28792 16 Piece Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 13 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.	lbs.
28792 SlimLine Slotted: 4.0, 5.5, 6.5mm	1.27
SlimLine Phillips: #1, #2	
SlimLine Terminal Xeno: #1, 2	
SlimLine TORX : T8, T10, T15, T20	
SlimLine Square: #1, #2	
28727 - Handle Range 20-70 Inch/lbs.	
SlimLine Blade Holder	

With Certificate of Calibration

T-handle TorqueControl Handles



Includes Calibration Certificate

[SHOP](#)

289 TorqueFix T-handle

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact.
With Certificate of calibration.

Item No.	Torque In-lbs.	Torque Nm	mm x mm	lbs.	pkg.
28931	53.1	6	56 x 120	.81	1
28933	70.8	8	56 x 120	.82	1
28935	88.5	10	56 x 120	.79	1
28937	106.2	12	56 x 120	.79	1
28938	110.6	12.5	56 x 120	.80	1
28939	123.9	14	56 x 120	.80	1

Each TorqueFix T-handle has unique serial number and certificate of calibration



Includes Calibration Certificate

[SHOP](#)

28940 Adjustable TorqueVario STplus T-handle

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact.

Item No.	Torque Nm	Torque In-lbs.	mm x mm	lbs.	pkg.
28940	5-14	44.3-123.9	56 x 120	.81	1

* (1 Nm 8.8507) (Scale is shown in Nm only)

[SHOP](#)

289 TORX® Interchangeable Blades For TorqueFix T-Handle

TORX® tip blades on 6mm Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item						
No.	Size	mm	Inch	mm	lbs.	pkg.
28903	T15	130	5.1	6.0	.10	1
28904	T20	130	5.1	6.0	.10	1
28905	T25	130	5.1	6.0	.11	1
28906	T27	130	5.1	6.0	.11	1
28907	T30	130	5.1	6.0	.11	1
28908	T40	130	5.1	6.0	.11	1

[SHOP](#)

289 TORXPlus® Interchangeable Blades For TorqueFix T-Handle

TORXPlus® tip blades on 6mm Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item						
No.	Size	mm	Inch	mm	lbs.	pkg.
28910	IP15	130	5.1	6.0	.10	1
28911	IP20	130	5.1	6.0	.10	1
28912	IP25	130	5.1	6.0	.11	1
28913	IP27	130	5.1	6.0	.11	1
28914	IP30	130	5.1	6.0	.11	1
28915	IP40	130	5.1	6.0	.11	1

[SHOP](#)

289 Hex Metric Interchangeable Blades For TorqueFix T-Handle

Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					
No.	mm	mm	Inch	lbs.	pkg.
28916	3.0	130	5.1	.11	1
28917	4.0	130	5.1	.11	1
28918	5.0	130	5.1	.11	1
28919	6.0	130	5.1	.11	1

[SHOP](#)

289 Hex Inch Interchangeable Blades For TorqueFix T-Handle

Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					
No.	Inch	mm	Inch	lbs.	pkg.
28920	1/8	130	5.1	.11	1
28921	9/64	130	5.1	.11	1
28922	5/32	130	5.1	.11	1
28923	3/16	130	5.1	.11	1
28924	7/32	130	5.1	.11	1

Wiha T-handle TorqueControl Adapters



SHOP

289 TorqueFix Adapter For 1/4" & 3/8" Sockets

Shaft CVM steel, hardened, corrosion protected.

Item						
No.	Size	mm	Inch	mm	lbs.	pkg.
28926	1/4	100	3.9	6.0	.12	1
28927	3/8	100	3.9	6.0	.15	1

[SHOP](#)

28925 TorqueFix Quick Release Bit Holder

Shaft CVM steel, hardened, corrosion protected.

Item						
No.	Size	mm	Inch	mm	lbs.	pkg.
28925	1/4	125	4.9	6.0	.15	1



Notes:

Wiha TorqueControl Adapters

Adapters For TorqueFix™ & TorqueVario™



[SHOP](#)

28581 Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
28581	1/4	149	4.0	.09	1



[SHOP](#)

28582 Square Drive Adapter For 1/4" Sockets Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
28582	1/4	145	4.0	.08	1



[SHOP](#)

28583 Adapter Blade For Wiha 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
28583	4.0	149	4.0	.09	1



[SHOP](#)

28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					
No.	Size	mm	mm	lbs.	pkg.
28882	1/4	162	4.0	.09	1

Wiha Torque Cable Keys



Torque handles recommended
#28552 & #28504

[SHOP](#)

286 Torque Cable Key For Threaded Hex Connectors

For torque controlled fastening of cable plug connectors with Hex heads. Used with Wiha-TorqueControl Screwdrivers.

Item					Max		
No.	Size	mm	mm	mm	Nm	pkg.	lbs.
28620	8mm	4.0	78	218	1.0	1	.06
28622	9mm	4.0	78	218	1.0	1	.06
28624	11mm	4.0	78	218	1.5	1	.06
28626	12mm	4.0	78	218	1.5	1	.06
28627	13mm	4.0	78	218	1.5	1	.06
28629	14mm	4.0	78	218	1.5	1	.06
28632	17mm	4.0	78	218	1.5	1	.06
28633	18mm	4.0	78	218	1.5	1	.06
28637	22mm	4.0	90	233	2.0	1	.10
28638	24mm	4.0	90	233	2.0	1	.10

28644 Torque Cable Key For Threaded Hex Connectors - Inch


Item					Max		
No.	Size	mm	mm	mm	Nm	pkg.	lbs.
28644	1/2"	4.0	78	218	1.5	1	.06



“easy” Torque

- Audible Click At Torque
- Replaceable Blades
- +/- 10% Repeatability
- Improve Productivity
- Reduces Waste
- Controls Costs
- Save Time!

Each tool
factory
preset

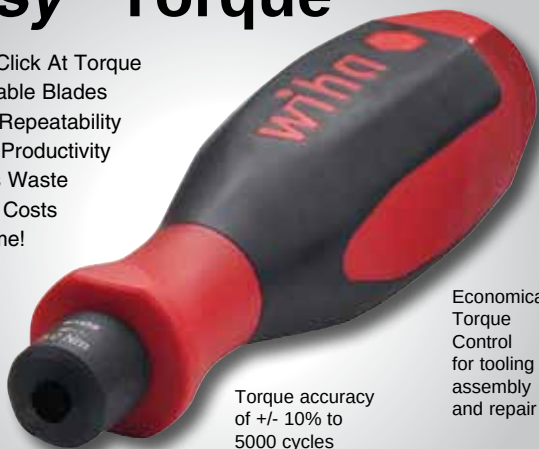

Torque accuracy
of +/- 10% to
5000 cycles

Economical
Torque
Control
for tooling
assembly
and repair

Uses 285 interchangeable
blades on page 5

Reverse torque is 50% greater for
easy removal using same tool

Wiha Easy Torque Handles



SHOP

292 Easy Torque Screwdriver Handle

Easy Torque value pre-set. Release accuracy +/- 10%.
SoftFinish cushion grip handle for good power transfer.

Item No.	Pre-Sets					
	Inch/lbs.	Nm	mm	Inch	lbs.	pkg.
29205	4.4	0.5	294	5.4	.20	1
29206	5.3	0.6	294	5.4	.20	1
29209	8.0	0.9	294	5.4	.20	1
29211	9.7	1.1	294	5.4	.20	1
29212	10.6	1.2	294	5.4	.20	1
29214	12.4	1.4	294	5.4	.20	1
29220	17.7	2.0	294	5.4	.20	1
29225	22.1	2.5	294	5.4	.20	1
29230	26.6	3.0	294	5.4	.20	1
29238	33.6	3.8	294	5.4	.20	1
29241	35.4	4.0	294	5.4	.20	1
29245	39.8	4.5	294	5.4	.20	1
29251	44.2	5.0	294	5.4	.20	1

* No Calibration Certificates

- Handles are larger for easier Torque application
- SoftFinish Cushion Grips for improved user Comfort
- Design has been improved to add significantly to durability and overall tool life.
- Accuracy remains at +/- 10% with NO certificate of calibration.
- Three additional Torque Handles have been added
4 Nm, 4.5 Nm, 5 Nm



SHOP

292 Easy Torque Screwdriver Handle With TORX® Blades

Easy Torque value pre-set. Release accuracy +/- 10%.
Internal mechanism clicks when torque value has been attained.
Cushion grip comfortable handle for good power transfer.

Item No.	Pre-Sets				
	Size	Inch/lbs.	Nm	lbs.	pkg.
29232	T5	4.4	0.5	.24	1
29233	T6	5.3	0.6	.24	1
29234	T7	8.0	0.9	.24	1
29236	T8	10.6	1.2	.25	1
29237	T9	12.4	1.4	.25	1
29239	T10	17.7	2.0	.26	1
29242	T15	26.6	3.0	.26	1
29243	T20	35.4	4.0	.26	1
29244	T25	44.2	5.0	.28	1

* No Calibration Certificates



SHOP

292 Easy Torque Screwdriver Handle With TORXPlus® Blades

Easy Torque value pre-set. Release accuracy +/- 10%.
Internal mechanism clicks when torque value has been attained.
Cushion grip comfortable handle for good power transfer.

Item No.	Pre-Sets				
	Size	Inch/lbs.	Nm	lbs.	pkg.
29246	IP5	4.4	0.5	.24	1
29247	IP6	5.3	0.6	.24	1
29248	IP7	8.0	0.9	.24	1
29249	IP8	10.6	1.2	.25	1
29252	IP9	12.4	1.4	.25	1
29253	IP10	17.7	2.0	.26	1
29254	IP15	26.6	3.0	.26	1
29255	IP20	35.4	4.0	.26	1
29256	IP25	44.2	5.0	.28	1

* No Calibration Certificates



Numerical Index by Item Number

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
28308	9	28547	4	28624	12	28923	11	75025	5
28309	9	28548	4	28626	12	28924	11	75030	5
28312	9	28549	4	28627	12	28925	11	75035	5
28315	9	28550	3	28629	12	28926	11	75040	5
28317	9	28551	3	28632	12	28927	11	75105	5
28319	9	28552	3	28633	12	28931	10	75110	5
28327	9	28553	3	28637	12	28933	10	75115	5
28329	9	28554	3	28638	12	28935	10	75120	5
28339	9	28555	4	28644	12	28937	10	75307	5
28340	9	28556	4	28690	7	28938	10	75309	5
28341	9	28557	4	28724	9	28939	10	75313	5
28342	9	28558	4	28726	9	28940	10	75315	5
28346	9	28559	4	28727	9	29102	12	75320	5
28347	9	28560	4	28734	9	29104	12	75322	5
28350	9	28561	4	28736	9	29106	12	75325	5
28501	3	28562	4	28737	9	29108	12	75327	5
28502	3	28563	4	28791	10	29110	12	75330	5
28503	3	28564	4	28792	10	29112	12	75332	5
28504	3	28565	4	28801	8	29114	12	75340	5
28505	3	28566	4	28803	8	29116	12	75342	5
28506	3	28567	4	28805	8	29118	12	75350	5
28507	3	28568	4	28807	8	29120	12	75352	5
28508	3	28569	4	28809	8	29205	14	75354	5
28509	3	28571	4	28810	8	29206	14	75356	5
28511	3	28572	4	28812	8	29209	14	75358	5
28512	4	28573	4	28814	8	29211	14	75360	5
28513	3	28574	4	28816	8	29214	14	75362	5
28515	3	28575	4	28825	8	29220	14	75364	5
28517	3	28576	4	28826	8	29225	14	75366	5
28518	3	28577	4	28827	8	29230	14	75368	5
28519	3	28578	4	28828	8	29232	14	75370	5
28521	3	28579	4	28829	8	29233	14	75372	5
28522	8	28581	12	28830	8	29234	14	75703	5
28523	3	28582	12	28882	12	29236	14	75704	5
28524	8	28583	5,12	28890	8	29237	14	75705	5
28525	3	28587	4	28891	3	29239	14	75706	5
28526	8	28588	4	28892	3	29242	14	75707	5
28527	4	28589	6	28893	3	29243	14	75708	5
28528	4	28590	6	28903	11	29244	14	75709	5
28529	4	28591	8	28904	11	29246	14	75710	5
28530	4	28592	8	28905	11	29247	14	75715	5
28531	4	28593	6	28906	11	29248	14	75720	5
28532	4	28595	6	28907	11	29249	14	75727	5
28533	4	28596	7	28908	11	29252	14	75728	5
28534	4	28597	7	28910	11	29253	14	75729	5
28535	4	28598	7	28911	11	29254	14	75735	5
28536	4	28599	7	28912	11	29255	14	75739	5
28537	4	28611	4	28913	11	29256	14	75742	5
28538	4	28612	4	28914	11	29238	14		
28539	4	28613	4	28915	11	29241	14		
28540	4	28614	4	28916	11	29245	14		
28541	4	28616	4	28917	11	29251	14		
28542	4	28617	4	28918	11	75008	5		
28543	4	28618	4	28919	11	75012	5		
28544	4	28619	4	28920	11	75015	5		
28545	4	28620	12	28921	11	75018	5		
28546	4	28622	12	28922	11	75020	5		



Presented By:



**CARBIDE
PROCESSORS**

(800) 346-8274

Fax: 253-476-1321

Email: sales@carbideprocessors.com

www.carbideprocessors.com

Catalog Item No. 99001
version - 10/1/13

Subject to change
without notice

©2013 Willi Hahn
Corporation

®Torx is a registered trademark of
Acument Intellectual Properties LLC.



99060.w0 - Product Guide



99004.w0 - Shop Tools Catalog



99914.w0 - TORX Catalog



99945.w0 - ESD Safe Catalog



99951.w0 - Bits Catalog



99002.w0 - Screwdrivers Catalog



99934.w0 - Hex Tools Catalog



99919.w0 - Insulated Catalog



99006.w0 - Tech Tools Catalog



99977.w0 - Pliers/Crimpers Catalog